

- [] [] [] [] windows []

```
# windows

# 
# netsh interface portproxy add v4tov4 listenport=< > listenaddress=< > connectport=< >
connectaddress=< >
netsh interface portproxy add v4tov4 listenport=3306 listenaddress=0.0.0.0 connectport=33309
connectaddress=8.x.y.z

# 
# netsh interface portproxy delete v4tov4 listenport=< > listenaddress=< >
netsh interface portproxy delete v4tov4 listenport=3306 listenaddress=0.0.0.0

# 
netsh interface portproxy show all
```

~~jdbc:mysql://mysql:33306/xxxxx~~ ~~jdbc:mysql://~~ \${mysql}:3306/xxxxx

IDEA

文件 System32\drivers\etc\hosts 只读

EasyHosts

更新于 2024/12/19 00:50:17


- g-zxfzd-test ✓
双击条目出现✓使生效
- g-zxfzd-test
- g-zxfzd-test
- g-zxfzd-test
- g-zxfzd-test
- g-zxfzd-test

增加一个分组方便管理

⊕ 添加条目

```
11 # Additionally, comments (such as these) may be inserted on indiv
12 # lines or following the machine name denoted by a '#' symbol.
13 #
14 # For example:
15 #
16 # 102.54.94.97 rhino.acme.com # source server
17 # 38.25.63.10 x.acme.com # x client host
18
19 # localhost name resolution is handled within DNS itself.
20 # 127.0.0.1 localhost
21 # ::1 localhost
22
23
24
25 # Added by Docker Desktop
26 10.0.6.47 host.docker.internal
27 10.0.6.47 gateway.docker.internal
28 # To allow the same kube context to work on the host and the cont
29 127.0.0.1 kubernetes.docker.internal
30 # End of section
31
32
33
34 # --- Add by EasyHosts ---
35 # g-zxfzd-test
36 127.0.0.1 mysql
37 127.0.0.1 redis
38
```

这里是合并后的hosts内容

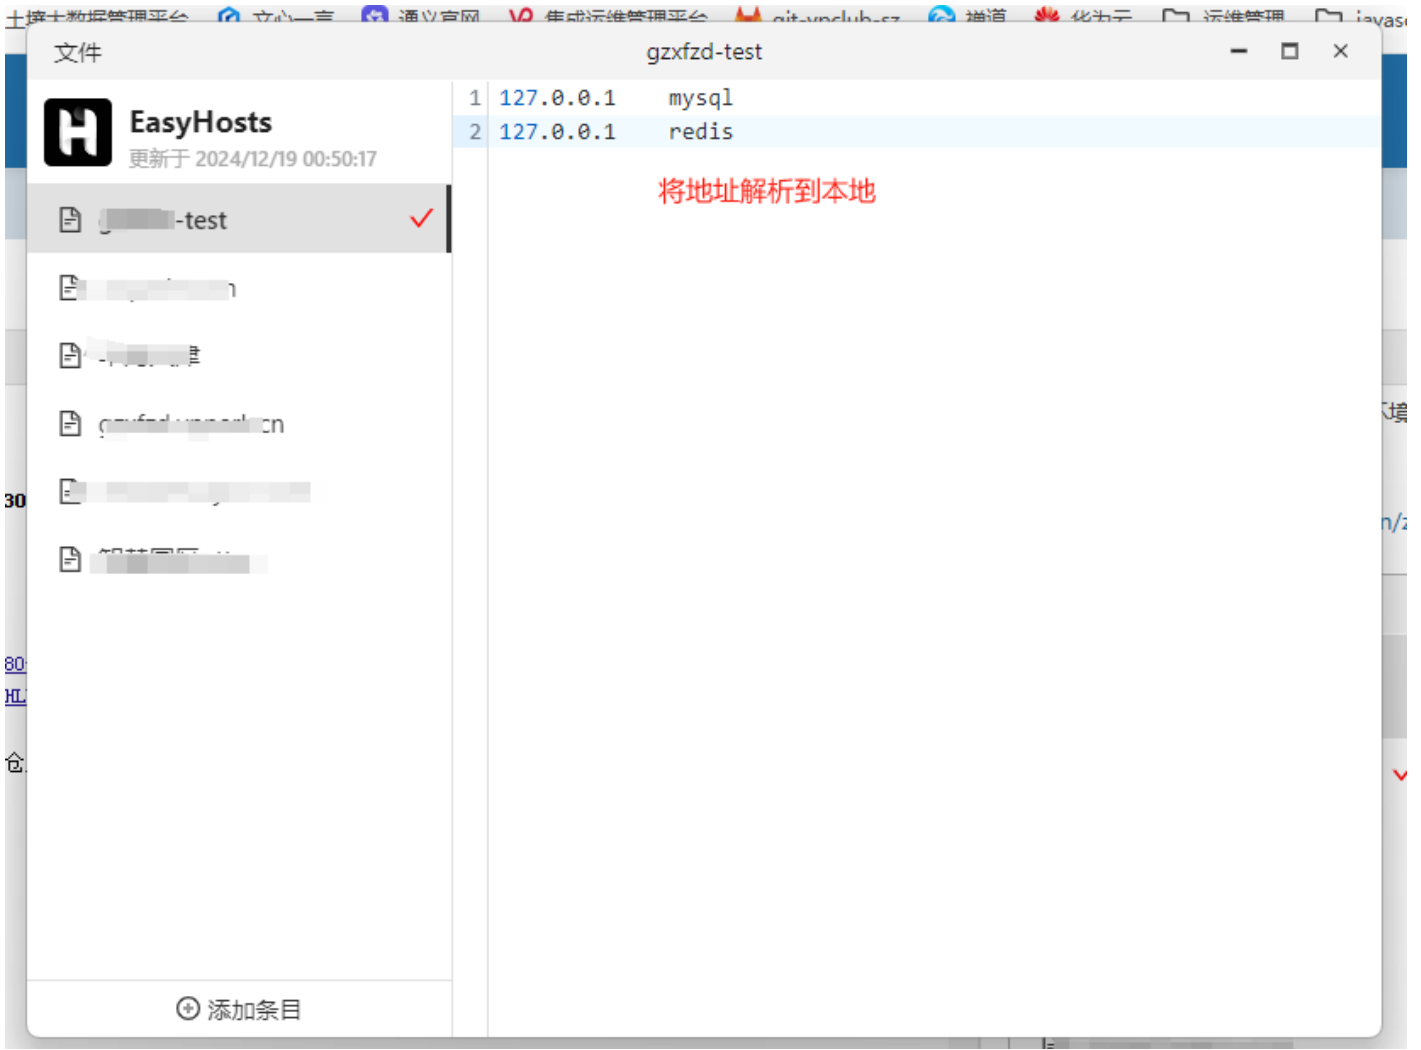

#36

18 ### 2024 14:25:16

29 ### 2026 16:40:23