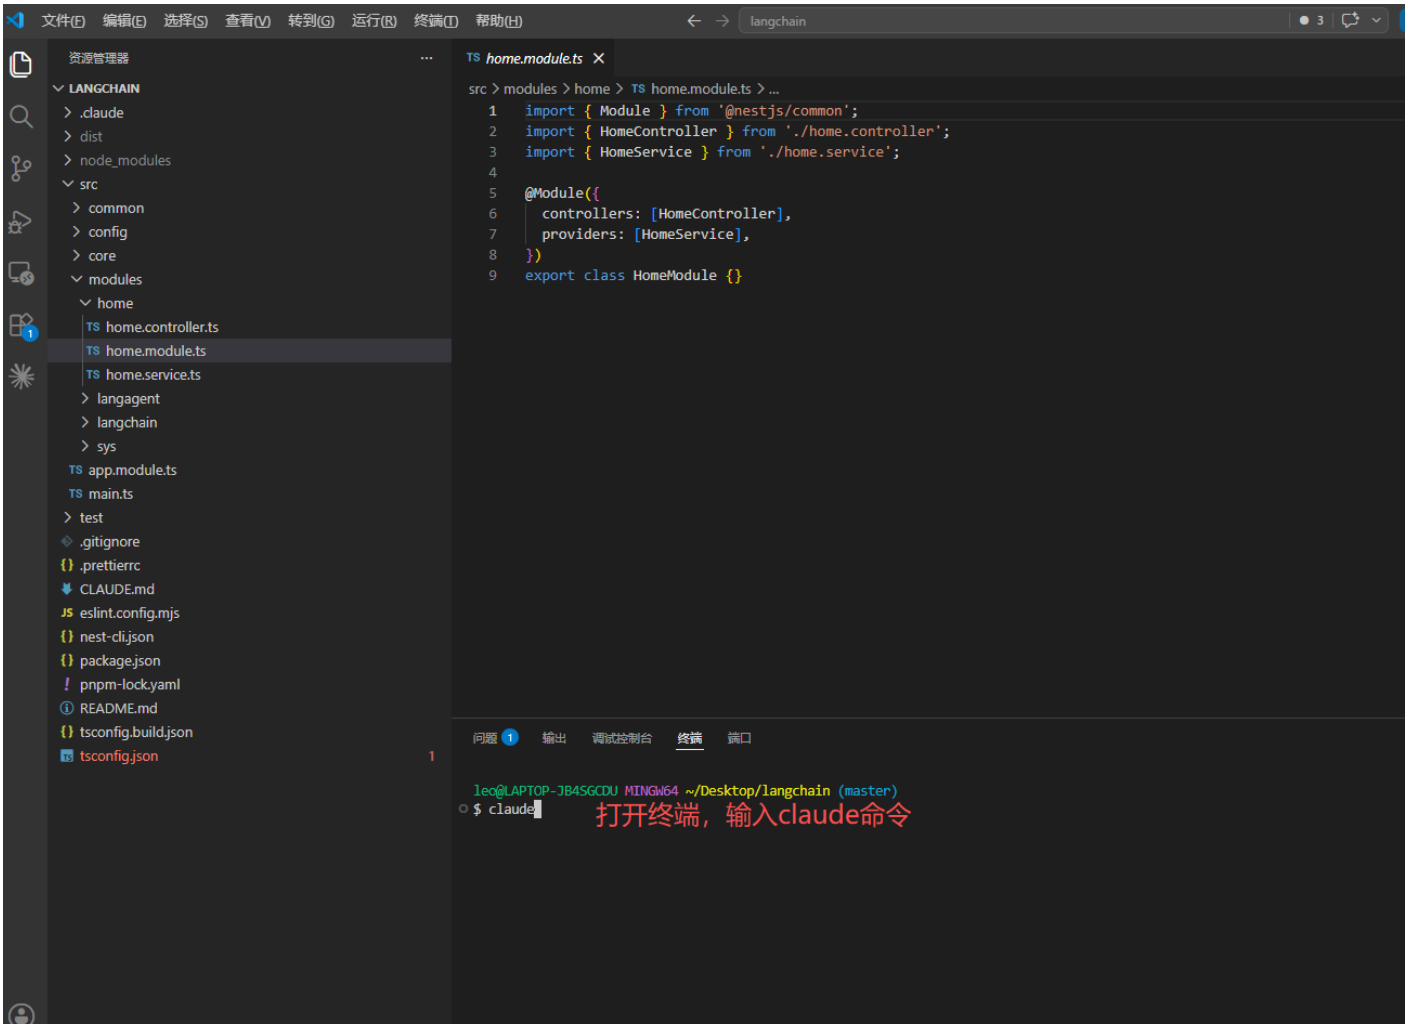
□vscode□□□claude code

□□□□claude

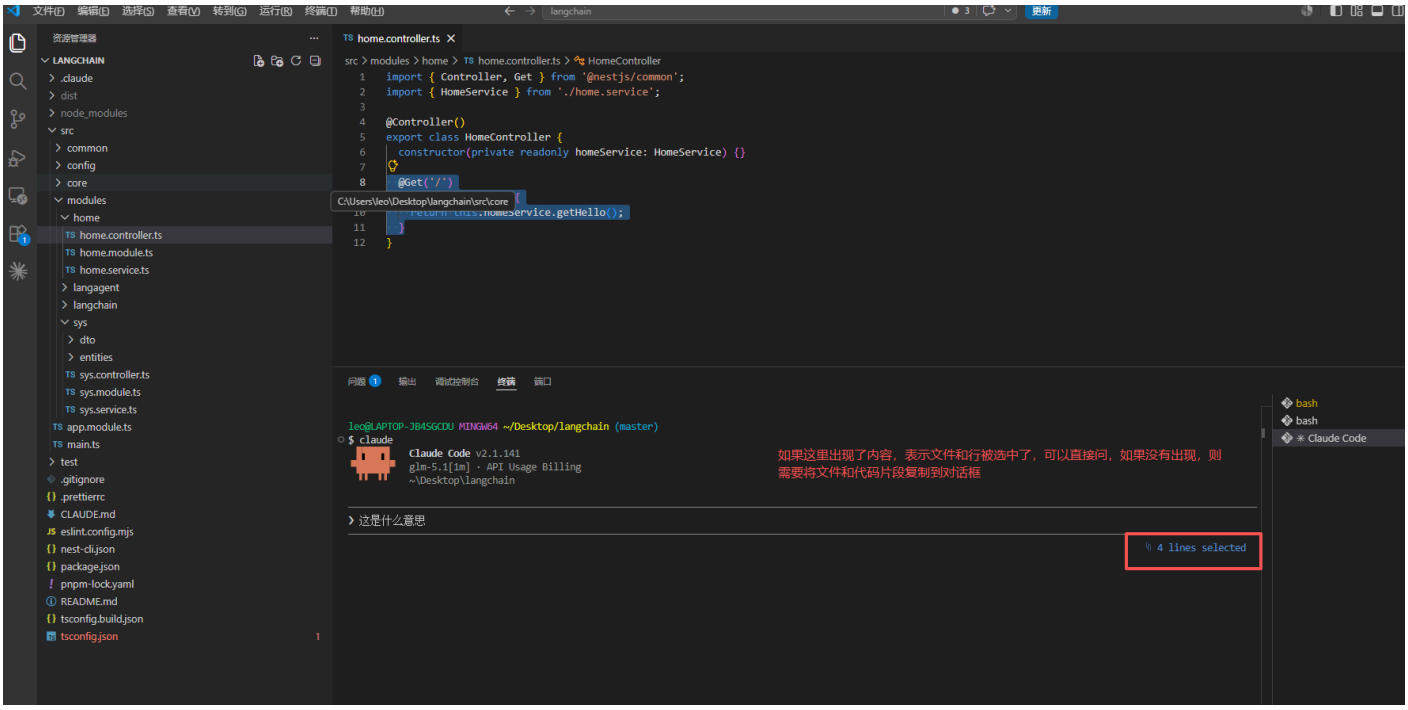
https://iovhm.com/book/books/bbcbf/page/ideaclaude-code

□□□□□□□□□□□□□□□IDE□

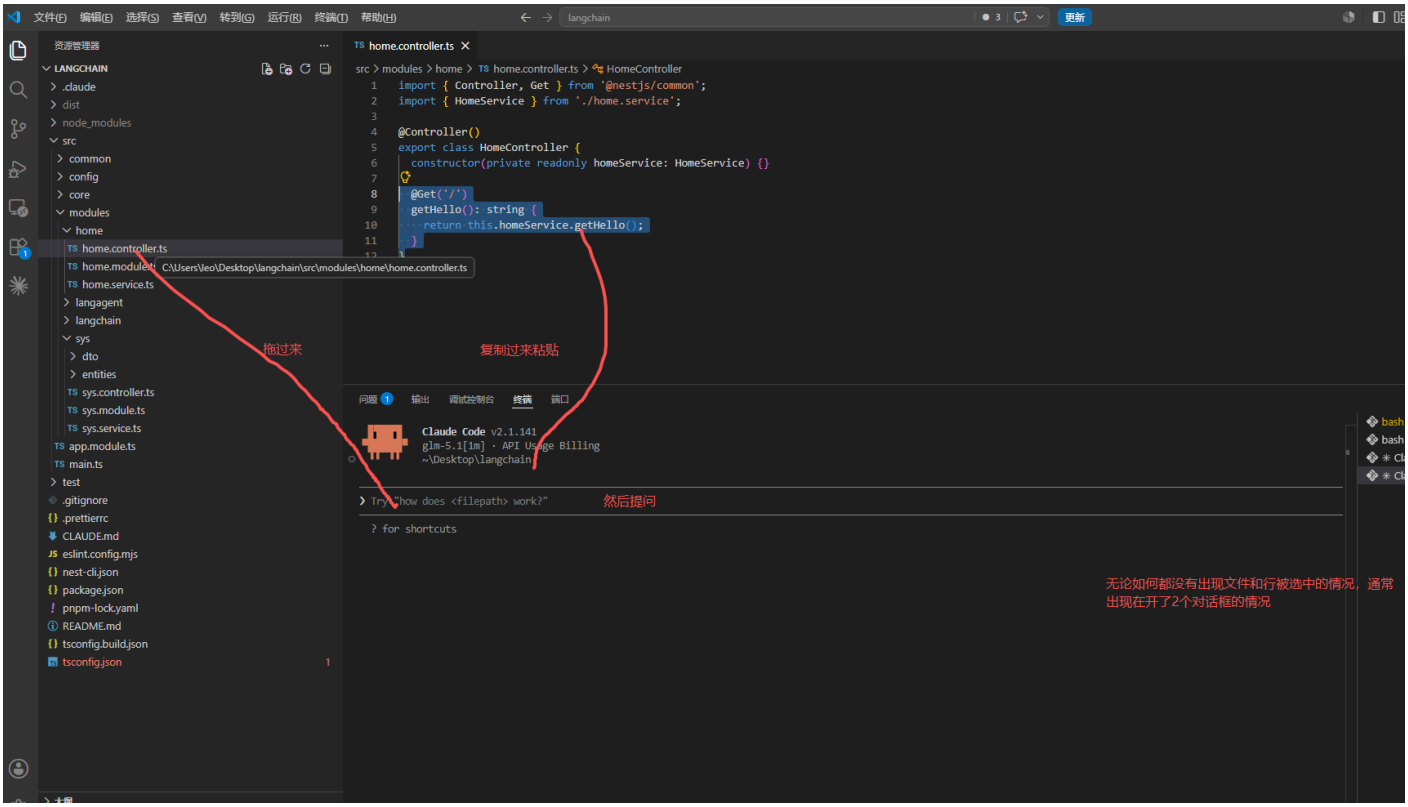
□□□□□□claude



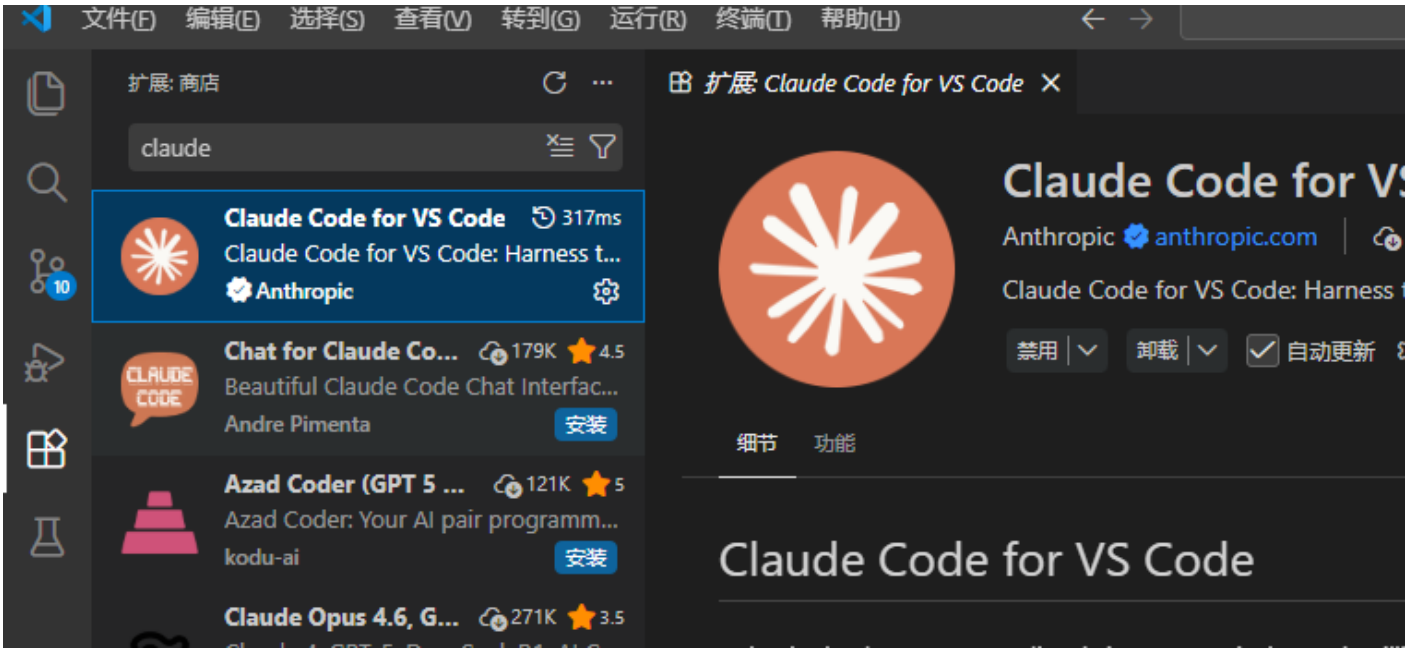
□□□□□□□□□□□□


home.controller.ts
@Get('/')
如果这里出现了内容，表示文件和行被选中了，可以直接问，如果没有出现，则需要将文件和代码片段复制到对话框
这是什么意思
4 lines selected

□□□□□□□□□□□□

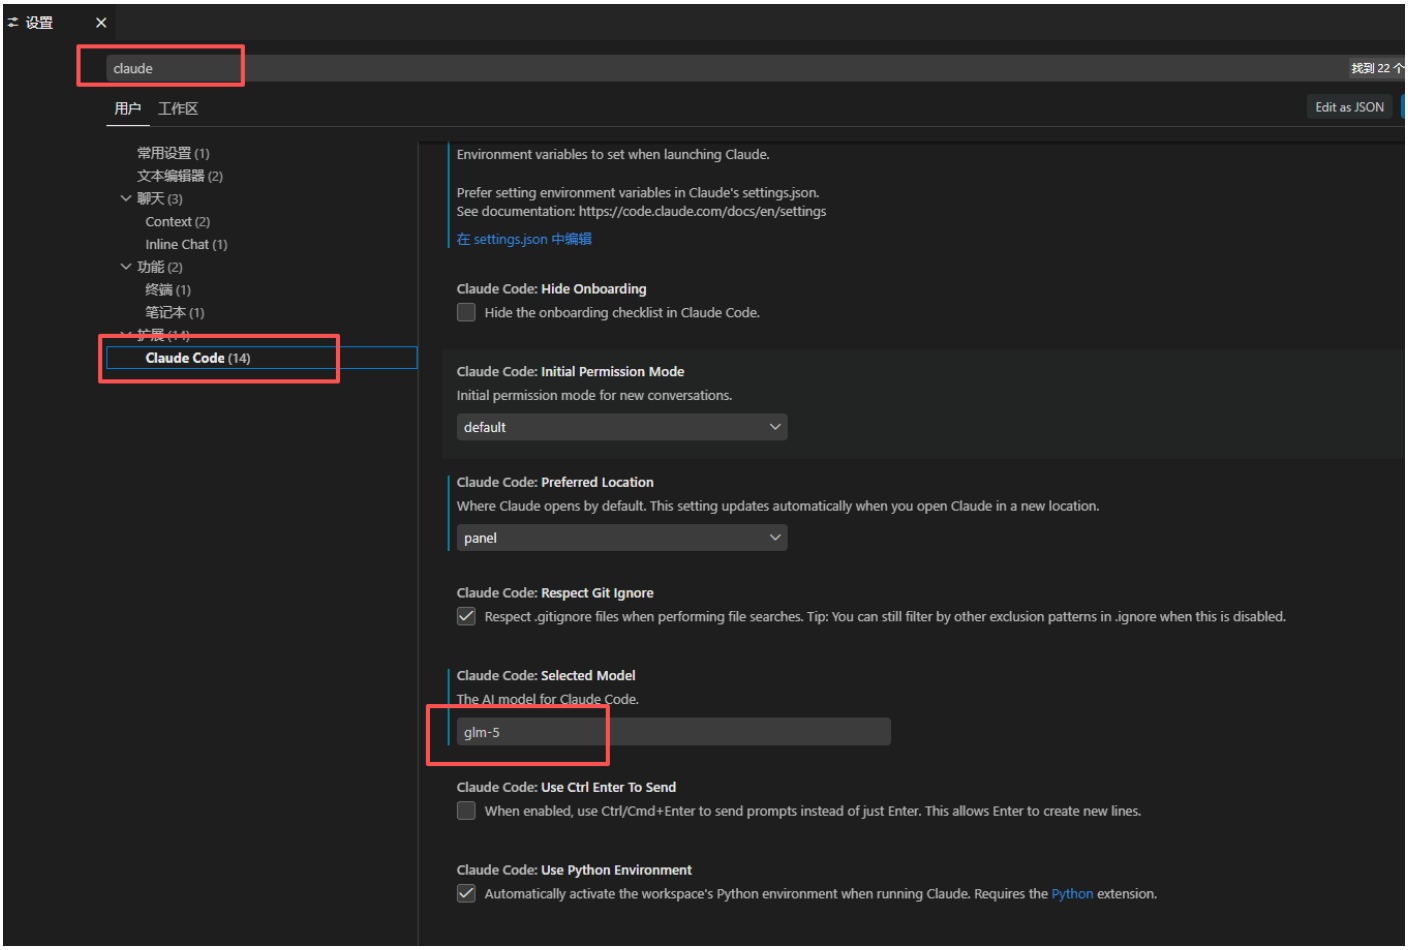

拖过来
复制过来粘贴
然后提问
无论如何都没有出现文件和行被选中的情况，通常出现在开了2个对话框的情况

□□□□□vscode□□

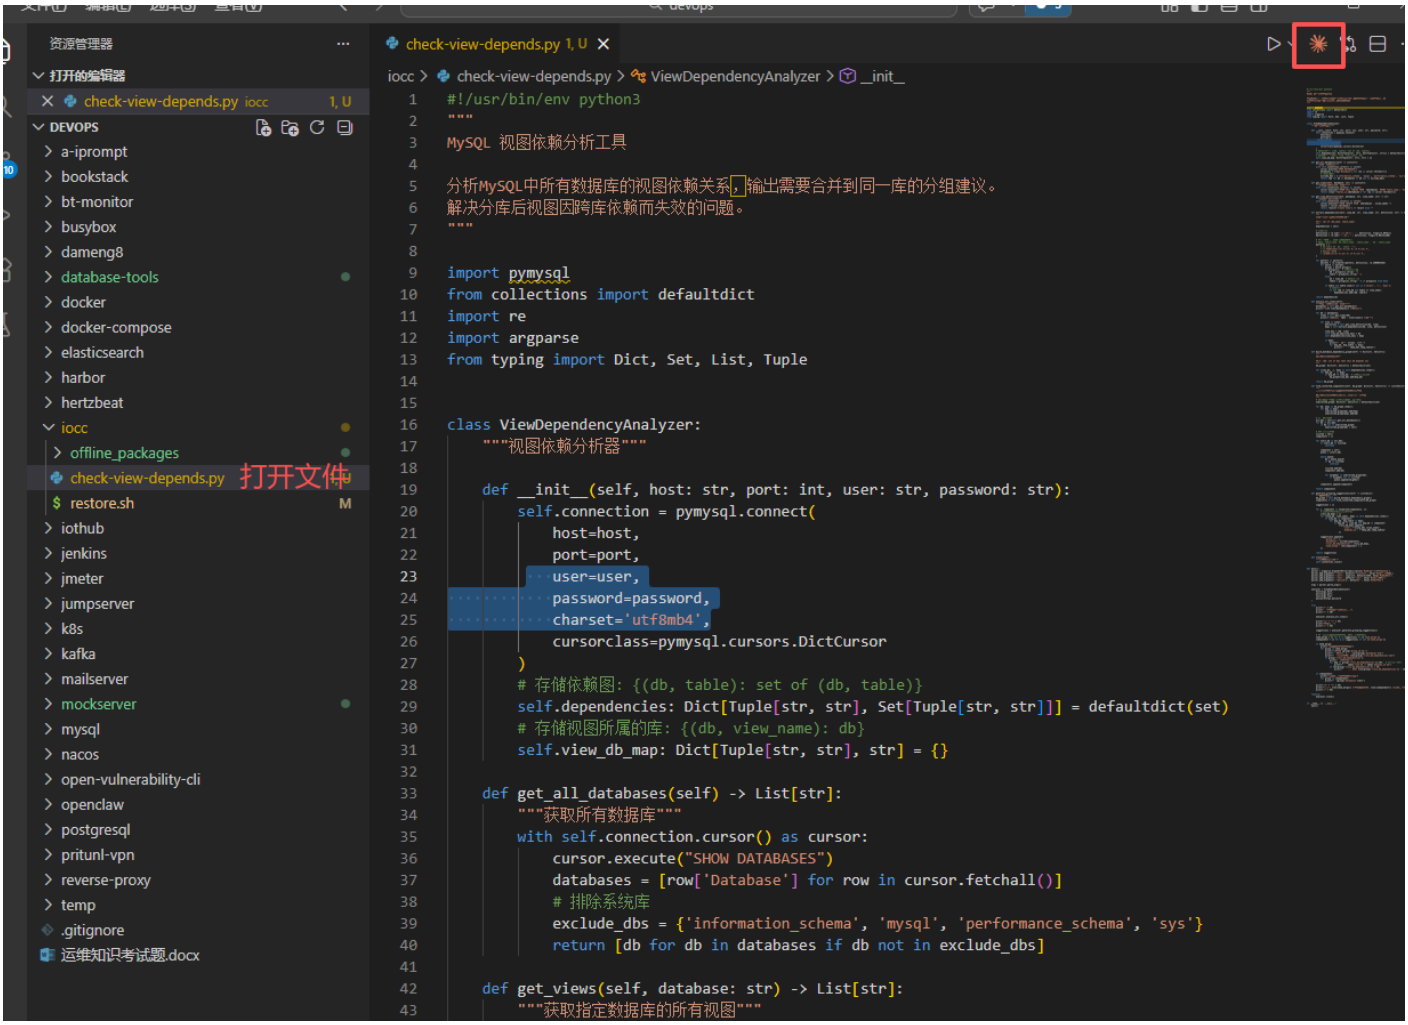

文件(F) 编辑(E) 选择(S) 查看(V) 转到(G) 运行(R) 终端(T) 帮助(H)
扩展: 商店
claude
Claude Code for VS Code 317ms
Claude Code for VS Code: Harness t...
Anthropic
Chat for Claude Co... 179K 4.5
Beautiful Claude Code Chat Interfac...
Andre Pimenta
安装
Azad Coder (GPT 5 ... 121K 5
Azad Coder: Your AI pair programm...
kodu-ai
安装
Claude Opus 4.6, G... 271K 3.5
扩展: Claude Code for VS Code
Claude Code for VS
Anthropic anthropic.com
Claude Code for VS Code: Harness
禁用
卸载
自动更新
细节
功能
Claude Code for VS Code

□□□□

□□□□□□□□□□□□ID


设置
claude
找到 22 个
用户
工作区
Edit as JSON
常用设置 (1)
文本编辑器 (2)
聊天 (3)
Context (2)
Inline Chat (1)
功能 (2)
终端 (1)
笔记本 (1)
Claude Code (14)
Environment variables to set when launching Claude.
Prefer setting environment variables in Claude's settings.json.
See documentation: https://code.claude.com/docs/en/settings
在 settings.json 中编辑
Claude Code: Hide Onboarding
Hide the onboarding checklist in Claude Code.
Claude Code: Initial Permission Mode
Initial permission mode for new conversations.
default
Claude Code: Preferred Location
Where Claude opens by default. This setting updates automatically when you open Claude in a new location.
panel
Claude Code: Respect Git Ignore
Respect .gitignore files when performing file searches. Tip: You can still filter by other exclusion patterns in .ignore when this is disabled.
Claude Code: Selected Model
The AI model for Claude Code.
glm-5
Claude Code: Use Ctrl Enter To Send
When enabled, use Ctrl/Cmd+Enter to send prompts instead of just Enter. This allows Enter to create new lines.
Claude Code: Use Python Environment
Automatically activate the workspace's Python environment when running Claude. Requires the Python extension.

□□□□


资源管理器
打开的编辑器
check-view-depends.py iocc 1, U
DEVOPS
a-iprompt
bookstack
bt-monitor
busybox
dameng8
database-tools
docker
docker-compose
elasticsearch
harbor
hertzbeat
iocc
offline_packages
check-view-depends.py
restore.sh M
iothub
jenkins
jmeter
jumpserver
k8s
kafka
mailserver
mockserver
mysql
nacos
open-vulnerability-cli
openclaw
postgresql
pritunl-vpn
reverse-proxy
temp
.gitignore
运维知识考试题.docx
打开文件
check-view-depends.py 1, U
iocc > check-view-depends.py > ViewDependencyAnalyzer > __init__
#!/usr/bin/env python3
"""
MySQL 视图依赖分析工具
分析MySQL中所有数据库的视图依赖关系，输出需要合并到同一库的分组建议。
解决分库后视图因跨库依赖而失效的问题。
"""
import pymysql
from collections import defaultdict
import re
import argparse
from typing import Dict, Set, List, Tuple
class ViewDependencyAnalyzer:
"""视图依赖分析器"""
def __init__(self, host: str, port: int, user: str, password: str):
self.connection = pymysql.connect(
host=host,
port=port,
user=user,
password=password,
charset='utf8mb4',
cursorclass=pymysql.cursors.DictCursor
)
存储依赖图: {(db, table): set of (db, table)}
self.dependencies: Dict[Tuple[str, str], Set[Tuple[str, str]]] = defaultdict(set)
存储视图所属的库: {(db, view_name): db}
self.view_db_map: Dict[Tuple[str, str], str] = {}
def get_all_databases(self) -> List[str]:
"""获取所有数据库"""
with self.connection.cursor() as cursor:
cursor.execute("SHOW DATABASES")
databases = [row['Database'] for row in cursor.fetchall()]
# 排除系统库
exclude_dbs = {'information_schema', 'mysql', 'performance_schema', 'sys'}
return [db for db in databases if db not in exclude_dbs]
def get_views(self, database: str) -> List[str]:
"""获取指定数据库的所有视图"""



□□□ #7
□ □□□ □□□ 10 □□ 2026 08:06:09
□ □□□ □□□ 30 □□ 2026 05:16:25