


nginx-web API

API

nginx.conf

- hosts

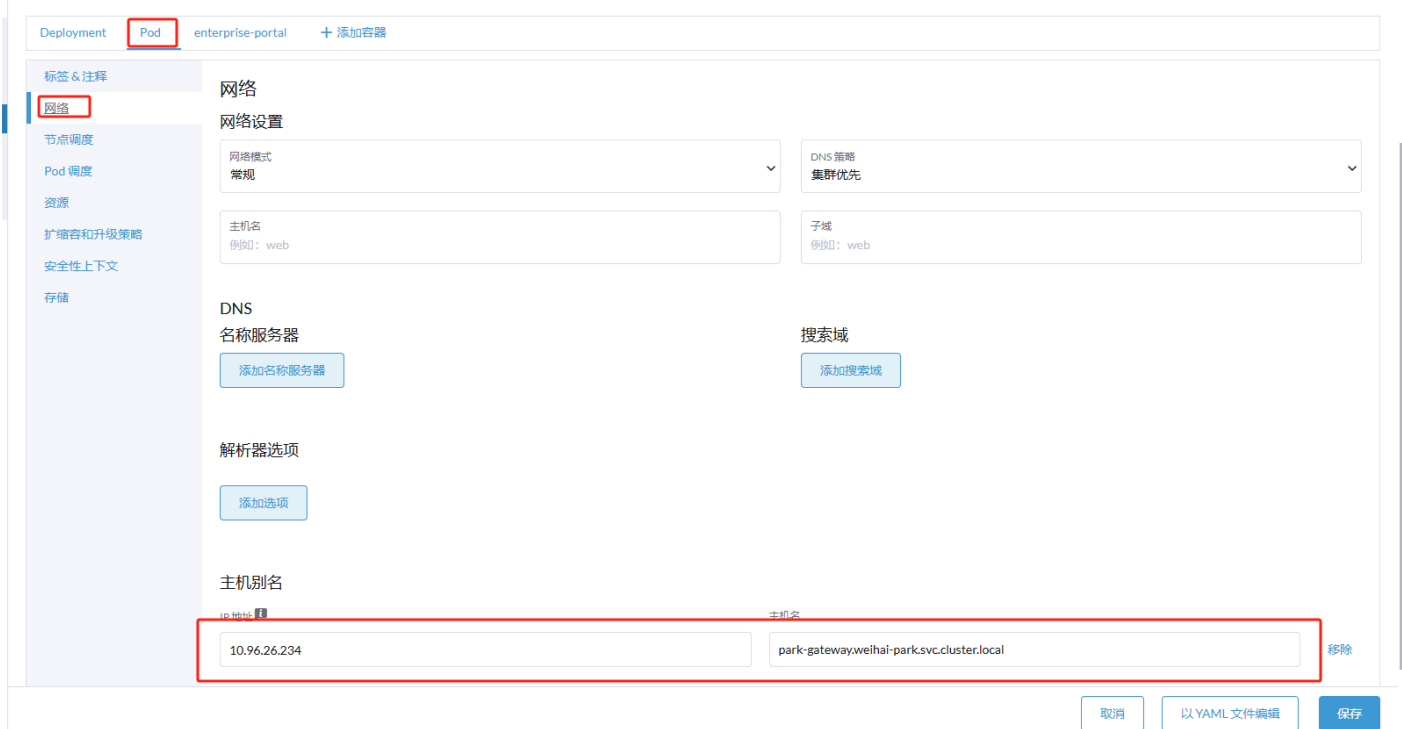

The screenshot shows the 'Network' configuration page for a Pod in the 'enterprise-portal' namespace. The 'Network' tab is selected. The 'Network Settings' section includes 'Network Mode' set to 'Default' and 'DNS Strategy' set to 'Cluster First'. The 'Host Name' is 'web' and the 'Subdomain' is 'web'. The 'DNS Name Servers' section has a 'Add Name Server' button. The 'Search Domain' section has a 'Add Search Domain' button. The 'Parser Options' section has an 'Add Option' button. The 'Host Aliases' section shows two entries: '10.96.26.234' and 'park-gateway.weihai-park.svc.cluster.local'. At the bottom right, there are buttons for 'Cancel', 'Edit with YAML', and 'Save'.

-

API

- API nginx

#!/bin/bash , #!/bin/sh

```
#!/bin/bash
# /bin/sh
# { - }
OLD_URL=${OLD_URL:-"https://park.wpark.com:802/"}
NEW_URL=${NEW_URL:-"http://weipin.hmncloud.top/"}
```

```

# [REDACTED]
sed -i "s|${OLD_URL}|${NEW_URL}|g" /usr/share/nginx/html/assets/iframe-view-4c8b16ca.js

# [REDACTED]
# grep -rl "ak=${OLD_AK}" /usr/share/nginx/html | xargs sed -i "s|ak=${OLD_AK}|ak=${NEW_AK}|g"

# [REDACTED]
# SEARCH_DIR="/usr/share/nginx/html/assets"
# FILE_PREFIX="iframe-view*.js"
# for FILE in $(find "$SEARCH_DIR" -type f -name "${FILE_PREFIX}"); do
#     # [REDACTED] sed [REDACTED] i [REDACTED]
#     sed -i "s|${OLD_URL}|${NEW_URL}|g" "$FILE"
#     # [REDACTED]
#     echo "Processed file: $FILE"
# done

# [REDACTED]nginx
nginx -g 'daemon off;'

```

- [REDACTED]configmap[REDACTED], [REDACTED]777 [REDACTED]

docker [REDACTED] docker-compose [REDACTED]777 [REDACTED]

[数据](#) [最近事件](#) [相关资源](#)

```

entrypoint.sh
#!/bin/bash
# 替换写死的api路径
sed -i 's|https://park.wvpark.com:802|http://weipin.hmnccloud.top|g' /usr/share/nginx/html/assets/iframe-view-4c8b16ca.js
# 启动nginx
nginx -g 'daemon off;'

```

